

Separator belts  
for product separation



# Clean separation. Perfectly done. Discover the difference.

The Esband separator belts combine unique materials with many years of experience and know-how of Schlatterer. Due to the high quality they are perfect for applications in the food industry, especially for the separation process of meat, poultry, fish and vegetables as well as recycling.


Quite often, technical details in the production process make the difference and ensure success. Our belts make a significant contribution to this because of their flexibility, smooth running performance and long-lasting lifetime. The Schlatterer concept also includes the profound support of our customer-oriented service.



**beef/poultry/pig**



**fruit/vegetables**

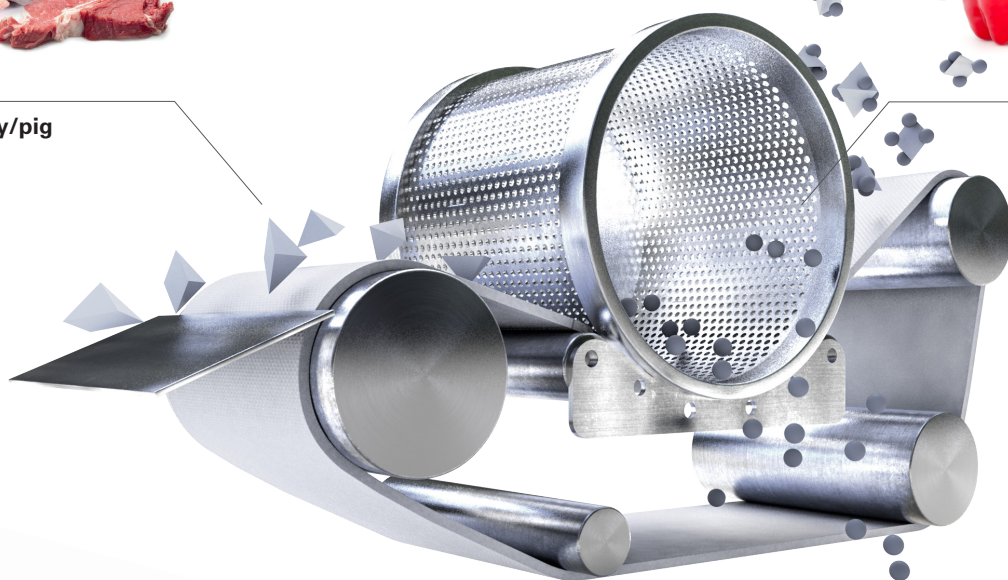

**fish**



**recycling**


## Our variants. Your choice.

Does your preparation process involve separating meat from bones, cartilage, tendons or feathers?  
Does the separation equipment work with a roller drive or chain drive?  
We can offer you different variants of our belts to suit your own particular requirements.

### Tension members made of endless special fabric

Highly tear-resistant and stretch-resistant

Completely coated by sealed edges

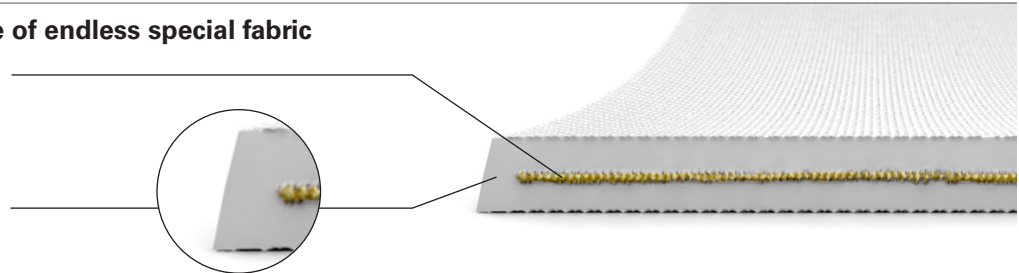

### High-performance coating materials FDA-conform

Each available for the outside and running side:

- FX with 85 Shore A\*
- FX with 92 Shore A\*
- GX with 70 Shore A\*
- GX with 90 Shore A\*
- LX with 98 Shore A\*




FDA conform conveyor belts meet the requirements of EU No. 10/2011 as well the standards of FDA (U. S. Food and Drug Administration)

\*General tolerances according to our homepage



### Surface texture can be selected for the outside and running side

- w-profile
- x-profile

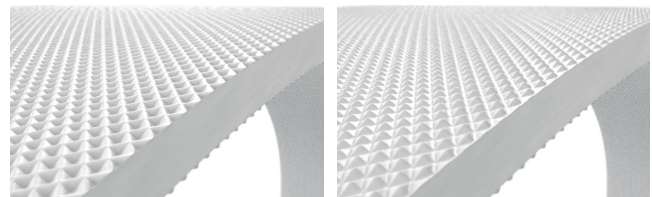

### Specific properties/characteristics:

- wear-resistant coating
- stable, resistant belt structure
- easy belt cleaning
- temperature-resistant up to 80 °C
- very good resistance to oils and greases
- long-lasting
- sealed edges

### Production dimensions:

length 1300 – 3000 mm, width 150 – 300 mm,  
thickness 10,0 – 17,0 mm

Do you have any special requirements?

We find the right solution for all your needs.  
**Our team will be happy to advise you.**



**Schlatterer**  
**Esband**

Max Schlatterer  
GmbH & Co. KG  
Robert-Bosch-Straße 9  
D-89542 Herbrechtingen  
Tel. +49 7324 15-0  
Fax +49 7324 15-280  
info@esband.de  
www.esband.de